


CUTTING AND SANDING DISCS RED LINE

Application:

Cutting/sanding of solid materials, pipes, profiles and sheets

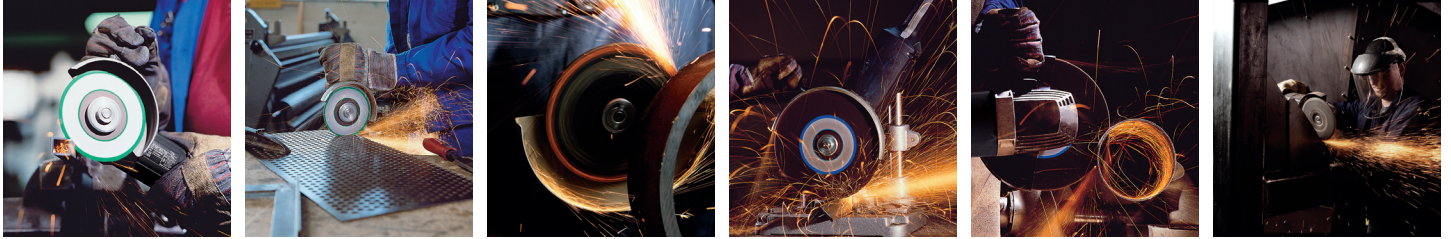

Properties

- Classic cutting/sanding discs with synthetic resin as a binder, reinforced fibers.
- For manual cutting/sanding using electric or pneumatic angle grinders.
- High break resistance.
- Maximum circumferential speed 80 m/s.

CUTTING DISCS RED LINE



RED LINE

Blue for steel

Diameter x thickness [mm]	Mount hole [mm]	Variation	Max. rotation speed [o/min]	Product no.	Package /item
115 x 2,5	22,23		13.300	0669 201152	25/5
125 x 2,5	22,23		12.250	0669 201252	25/5
180 x 3,0	22,23		8.500	0669 201803	25/5
230 x 3,0	22,23		6.650	0669 202303	25/5
350 x 2,5	25,4		4.400	0669 203502	25/5



RED LINE

Green for stainless steel

Diameter x thickness [mm]	Mount hole [mm]	Variation	Max. rotation speed [o/min]	Product no.	Package /item
115 x 1,0	22,23		13.300	0669 230111	100/10
125 x 1,0	22,23		12.250	0669 230121	100/10
230 x 1,8	22,23		6.650	0669 230231	25/5
350 x 3,0	25,4		4.400	0669 230353	25/5

SANDING DISCS RED LINE



RED LINE

Blue for steel

Diameter x thickness [mm]	Mount hole [mm]	Variation	Max. rotation speed [o/min]	Product no.	Package /item
115 x 6,0	22,23		13.300	0669 260116	25/5
125 x 6,0	22,23		12.250	0669 260126	25/5
180 x 6,0	22,23		8.500	0669 260186	25/5
230 x 6,0	22,23		6.650	0669 260236	10/5