


Countersunk screw with hexagon socket head

ISO 10642, steel 010.9, plain

Material	Steel
Property class	010.9
Surface	Plain
RoHS-compliant	Yes
Drive type	Hexagon socket
Thread type	Metric thread
Thread format	Standard metric thread
Product class	A

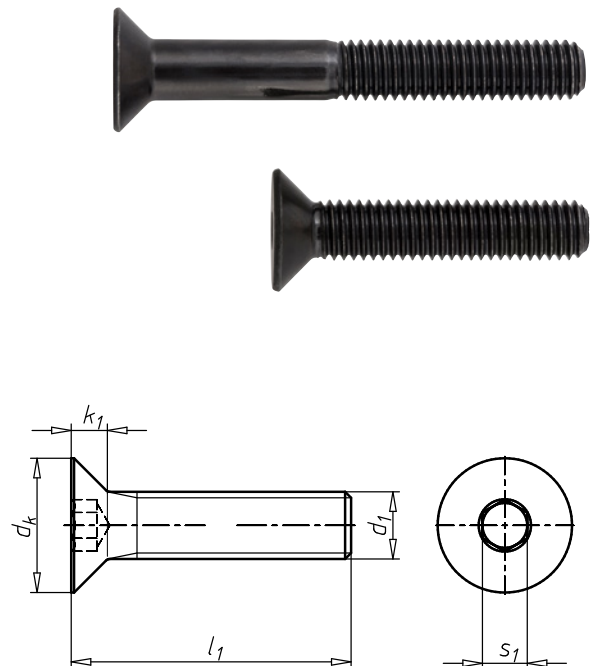

Thread type x nominal diameter (d1)	Length (l1)	Head diameter (dk)	Head height (k1)	Internal drive (s1)	Standards	Head type	Art. no.	P. Qty.
M2	4 mm	4.09 mm	1.45 mm	HS1.5	ISO 10642	Countersunk head	0089 2 4	500
M2	6 mm	4.09 mm	1.45 mm	HS1.5	ISO 10642	Countersunk head	0089 2 6	500
M2	20 mm	4.09 mm	1.45 mm	HS1.5	ISO 10642	Countersunk head	0089 2 20	500
M3	4 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 4	500
M3	5 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 5	2000
M3	6 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 6	1000
M3	8 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 8	500/2000
M3	10 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 10	500/1000
M3	12 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 12	500
M3	16 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 16	500
M3	20 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 20	500/1000
M3	25 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 25	500
M3	30 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 30	500
M3	35 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 35	500

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M3	40 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 40	500
M3	45 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 45	200
M3	50 mm	5.81 mm	1.86 mm	HS2	ISO 10642	Countersunk head	0089 3 50	500
M4	6 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 6	500
M4	8 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 8	500/1000
M4	10 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 10	500/1000
M4	12 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 12	500/1000
M4	14 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 14	1000
M4	16 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 16	500/1000
M4	18 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 18	1000
M4	20 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 20	500/1000
M4	25 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 25	500
M4	30 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 30	500/1000
M4	35 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 35	500
M4	40 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 40	500
M4	45 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 45	500
M4	50 mm	7.96 mm	2.48 mm	HS2.5	ISO 10642	Countersunk head	0089 4 50	500
M5	6 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 6	500
M5	8 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 8	500/1000
M5	10 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 10	500/1000
M5	12 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 12	500
M5	14 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 14	500
M5	16 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 16	500/1000
M5	18 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 18	1000
M5	20 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 20	500
M5	25 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 25	500
M5	28 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 28	100
M5	30 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 30	500

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M5	35 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 35	200
M5	40 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 40	200
M5	45 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 45	200
M5	50 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 50	200
M5	60 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 60	200
M5	75 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 75	200
M5	90 mm	10.07 mm	3.1 mm	HS3	ISO 10642	Countersunk head	0089 5 90	200
M6	8 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 8	500
M6	10 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 10	500
M6	12 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 12	500
M6	14 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 14	500
M6	16 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 16	500
M6	18 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 18	500
M6	20 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 20	500
M6	22 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 22	500
M6	25 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 25	500
M6	30 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 30	500
M6	35 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 35	200
M6	40 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 40	200
M6	45 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 45	200
M6	50 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 50	200
M6	55 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 55	200
M6	60 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 60	200
M6	65 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 65	200
M6	70 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 70	100/200
M6	75 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 75	200
M6	80 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 80	100
M6	90 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 90	100

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M6	100 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 100	100
M6	110 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 110	100
M6	125 mm	12.16 mm	3.72 mm	HS4	ISO 10642	Countersunk head	0089 6 125	100
M8	8 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 8	100
M8	10 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 10	200
M8	12 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 12	200/400
M8	14 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 14	200
M8	16 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 16	200/500
M8	18 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 18	200
M8	20 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 20	200/500
M8	25 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 25	200
M8	30 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 30	200
M8	35 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 35	200
M8	40 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 40	200
M8	45 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 45	200
M8	50 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 50	200
M8	55 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 55	200
M8	60 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 60	200
M8	65 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 65	200
M8	70 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 70	100/200
M8	75 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 75	100
M8	80 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 80	200
M8	85 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 85	200
M8	90 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 90	100
M8	100 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 100	100
M8	110 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 110	100
M8	120 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 120	100
M8	130 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 130	100

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M8	140 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 140	50
M8	150 mm	16.43 mm	4.96 mm	HS5	ISO 10642	Countersunk head	0089 8 150	50
M10	12 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 12	200
M10	16 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 16	200
M10	20 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 20	200
M10	25 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 25	200
M10	30 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 30	200
M10	35 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 35	100
M10	40 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 40	100/200
M10	45 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 45	100
M10	50 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 50	100
M10	55 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 55	100
M10	60 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 60	100
M10	65 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 65	100
M10	70 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 70	100
M10	80 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 80	100
M10	90 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 90	100
M10	100 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 100	50
M10	110 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 110	100
M10	120 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 120	50
M10	140 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 140	50
M10	150 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 150	50
M10	160 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 160	50
M10	190 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 190	100
M10	250 mm	20.69 mm	6.2 mm	HS6	ISO 10642	Countersunk head	0089 10 250	10
M12	13 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 13	200
M12	16 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 16	100
M12	20 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 20	100

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M12	25 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 25	100
M12	30 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 30	100
M12	35 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 35	100
M12	40 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 40	100
M12	45 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 45	100
M12	50 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 50	100
M12	55 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 55	100
M12	60 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 60	100
M12	65 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 65	50
M12	70 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 70	50
M12	80 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 80	50
M12	90 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 90	50
M12	100 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 100	50
M12	110 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 110	50
M12	120 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 120	50
M12	130 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 130	50
M12	140 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 140	50
M12	150 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 150	50
M12	160 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 160	50
M12	180 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 180	25
M12	190 mm	24.81 mm	7.44 mm	HS8	ISO 10642	Countersunk head	0089 12 190	50
M14	25 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 25	50
M14	30 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 30	100
M14	35 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 35	100
M14	40 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 40	50
M14	45 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 45	50
M14	50 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 50	50
M14	60 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 60	50

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M14	70 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 70	50
M14	80 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 80	50
M14	90 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 90	50
M14	100 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 100	25
M14	120 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 120	50
M14	130 mm	28.31 mm	8.4 mm	HS10	ISO 10642	Countersunk head	0089 14 130	50
M16	20 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 20	50
M16	25 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 25	50
M16	30 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 30	50
M16	35 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 35	50
M16	40 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 40	50
M16	45 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 45	50
M16	50 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 50	50
M16	55 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 55	50
M16	60 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 60	50
M16	70 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 70	25
M16	80 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 80	25
M16	90 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 90	25
M16	100 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 100	25
M16	110 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 110	25
M16	120 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 120	25
M16	130 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 130	25
M16	140 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 140	25
M16	150 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 150	25
M16	160 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 160	25
M16	200 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 200	25
M16	340 mm	30.61 mm	8.8 mm	HS10	ISO 10642	Countersunk head	0089 16 340	25
M18	40 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 40	50

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M18	60 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 60	25
M18	70 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 70	25
M18	80 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 80	25
M18	90 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 90	25
M18	100 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 100	100
M18	120 mm	33 mm	8 mm	HS12	DIN 7991	Countersunk head	0089 18 120	25
M20	35 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 35	25
M20	40 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 40	25
M20	45 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 45	25
M20	50 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 50	25
M20	55 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 55	25
M20	60 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 60	25
M20	65 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 65	25
M20	70 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 70	25
M20	75 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 75	25
M20	80 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 80	25
M20	90 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 90	25
M20	100 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 100	25
M20	110 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 110	25
M20	120 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 120	25
M20	130 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 130	25
M20	140 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 140	25
M20	150 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 150	25
M20	160 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 160	10
M20	170 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 170	25
M20	180 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 180	10
M20	200 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 200	10
M20	250 mm	36.75 mm	10.16 mm	HS12	ISO 10642	Countersunk head	0089 20 250	1

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive (s ₁)	Standards	Head type	Art. no.	P. Qty.
M22	70 mm	36 mm	13.1 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 22 70	50
M24	40 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 40	10
M24	50 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 50	25
M24	55 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 55	25
M24	60 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 60	25
M24	70 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 70	25
M24	75 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 75	25
M24	80 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 80	25
M24	90 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 90	1/10/25
M24	100 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 100	10
M24	110 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 110	10
M24	120 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 120	10
M24	130 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 130	10
M24	140 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 140	10
M24	150 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 150	10
M24	180 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 180	10
M24	200 mm	39 mm	14 mm	HS14	DIN 7991	Countersunk head 60 degree	0089 24 200	10

Notice

ISO 10642 replaces DIN 7991 | There is some limited similarity (some head heights and head diameters have been changed | nominal Ø M18, M22, M24 are omitted | Stainless steels removed | strength classes 10.9 and 12.9 added).

These screws can only be subjected to limited loads due to their head geometry, see DIN EN ISO 898-1