


ADAPTER FOR HIGH/LOW PRESSURE

Renault adapter



Designation	Art. No.	P. Qty.
Adapter for vehicles with only one service port on the low-pressure side, with the connection dimensions of a high-pressure service port.	0764 000 117	1

ADAPTER FOR HIGH-PRESSURE SERVICE PORT


Extension



Designation	Art. No.	P. Qty.
The straight extension allows easier access to high-pressure service ports that are difficult to access due to plastic linings . R134A	0764 000 121	1
The straight extension allows easier access to high-pressure service ports that are difficult to access due to plastic linings . R1234YF	1764 000 094	1

ADAPTER FOR LOW-PRESSURE SERVICE PORT

Extension

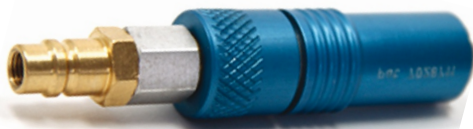

Designation	Art. No.	P. Qty.
The straight extension allows easier access to low-pressure service ports that are difficult to access due to plastic linings . R134A	0764 000 122	1
The straight extension allows easier access to low-pressure service ports that are difficult to access due to plastic linings . R1234YF	1764 000 686	1

ADAPTER "K"

Connection to vehicle's air conditioner



Designation	Art. No.	P. Qty.
Used for connection between HP service port to the car air-conditioner and leak detector additive sticks.	0764 000 111	1

ADAPTER "S"

Connection to air-conditioning service unit



Designation	Art. No.	P. Qty.
Used for connection between leak detector additive stick and air-conditioning service unit.	0764 000 112	1

TAMPERPROOF CLICK LOCKS

Click Lock for R134a / R-1234yf



Designation	Art. No.	P. Qty.
A simple tamperproof seal that is placed over the existing service connections of R134a systems	0764 000 450	25
A simple tamperproof seal that is placed over the existing service connections of R1234yf systems	1764 000 702	25