

## SIGHTGLASS FOR A/C DIAGNOSIS



Art. No.	P. Qty.
1764 000 756	1

**The Sightglass for A/C Diagnosis is a convenient instrument to make the refrigerant flow visible.**


- Presence of leak "stop" substances
- Compressor damage caused by metal particles and shavings
- Charge level of the system
- Quality of the refrigerant oil
- Over - undercharge of the system
- Use and quality of any UV leak detection dye in the system

When showing the contents of the a/c system visible to your customer, you are making the non-visible very much visible. This sells jobs!

The unit comes complete with hoses and (quick) connects and is supplied in a carry case.

Technical Specifications	
Volume	96 ml
Length	without connections 230mm
OD	70mm
Max allowable pressure	25 bar (as per TÜV)
Max operating temperature	50 °C
Weight	1,000 gram (without connections)

## RECYCLE GUARD

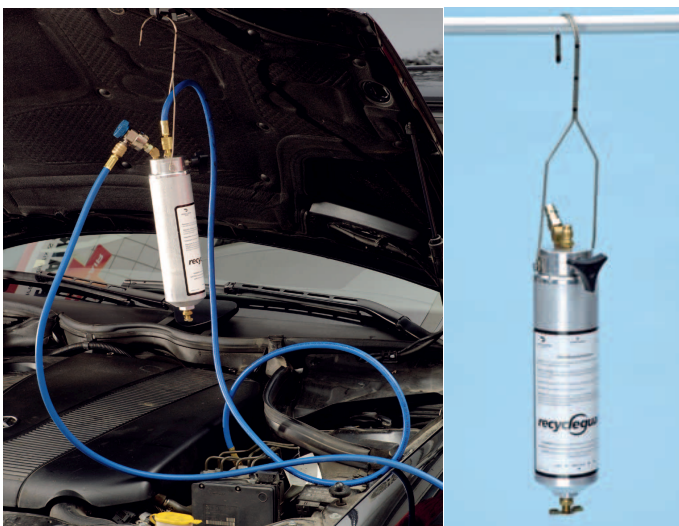

### Note:

The Recycle-Guard is delivered without a hose or hose connections, i. e. the corresponding hose package should always be ordered with it.

### Recycle-Guard

#### Art. No. 0764 000 550

- Protects your A/C service unit from contaminants, such as UV contrast agent, leak-stop agent etc.
- Separates and collects lubricant and contrast agent.
- Easy removal of collected "contaminants".
- Works on all R134a systems.
- Fast filter change.
- Installed filter insert is designed for several reuses.
- Installation between vehicle and Recycling-Station.
- Corresponding hose package optional (LP or HP).

**Art. No. 0764 000 555** Article for Replacement Filter (not pictured)

**Art. No. 0764 000 552** Article for LP Hose Package for Recycle-Guard

Connection via LP side of A/C service unit.

Contents:

- M14 low-pressure quick-release coupling
- 90 cm low-pressure hose
- Low-pressure connecting nipple