


Half round head safety screw with hexagon socket and pin Similar to ISO 7380-1, A2-070 stainless steel, plain

- Ideal for carrying out installations in schools, hospitals, museums, closed institutions, prisons and security facilities.
- Resistant to removal as a result of vandalism.
- Also suitable for outdoor use as made from stainless steel A2 material.

Standards	ISO Similar to 7380-1 CS
Material	Stainless steel A2
Property class	070
Surface	Plain
RoHS-compliant	Yes
Head type	Button head
Drive type	TX with safety pin
Thread type	Metric thread
Thread form	Standard metric thread

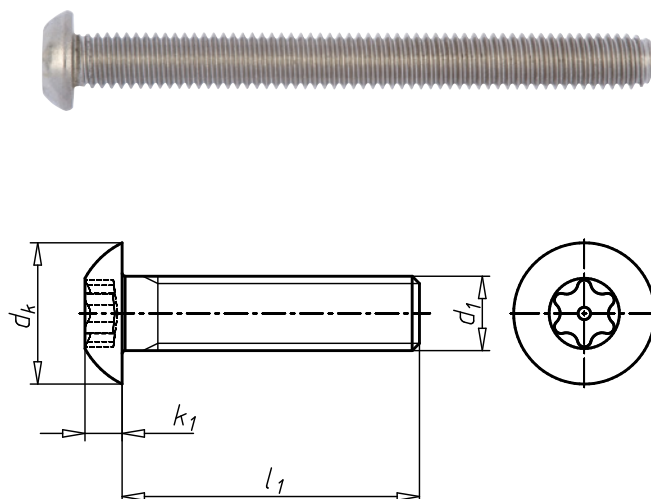

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive	Pitch	Art. no.	P. Qty.
M4	8 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 8	100
M4	10 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 10	100/500
M4	16 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 16	100/500
M4	20 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 20	100
M4	25 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 25	100
M4	30 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 30	200
M4	40 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 40	500
M4	50 mm	7.6 mm	1.95 mm	TX20+P	0.7 mm	0284 4 50	100
M5	8 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 8	100/500
M5	10 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 10	100/1000
M5	12 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 12	1000
M5	16 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 16	100/500
M5	20 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 20	100/200
M5	25 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 25	100/200
M5	30 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 30	100
M5	40 mm	9.5 mm	2.5 mm	TX25+P	0.8 mm	0284 5 40	500
M6	12 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 12	100
M6	16 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 16	100/1000
M6	20 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 20	100/200
M6	25 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 25	100
M6	30 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 30	100
M6	40 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 40	100
M6	60 mm	10.5 mm	3 mm	TX30+P	1 mm	0284 6 60	100
M8	20 mm	14 mm	4.1 mm	TX40+P	1.25 mm	0284 8 20	100
M8	25 mm	14 mm	4.1 mm	TX40+P	1.25 mm	0284 8 25	100
M8	30 mm	14 mm	4.1 mm	TX40+P	1.25 mm	0284 8 30	100
M8	40 mm	14 mm	4.1 mm	TX40+P	1.25 mm	0284 8 40	100

Details/Application

Mechanical engineering – to safeguard safety switches and safety systems against removal. Electronics – safety cabinets/switch cabinets.



Notice

A special tool is required for mounting and removal