


Type SKD coupling sleeve With hexagon socket and flange

- Connection can be loosened as many times as necessary
- Quickly screw into holes using manual, electrical or pneumatic tools
- Sharp self-tapping male thread

Material	Steel
Surface	Plain
RoHS-compliant	Yes

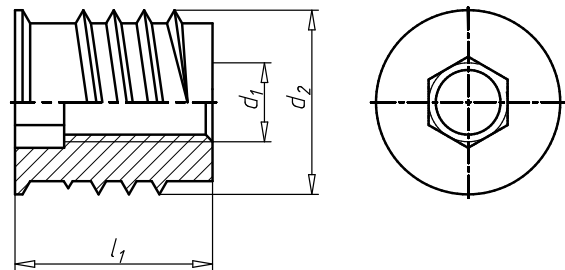

Thread type x nominal diameter (d_1)	Outer diameter (d_2)	Length (l_1)	Internal drive	Art. no.	P. Qty.
M4	8 mm	10 mm	HS4	0376 24 10	250
M5	10 mm	12 mm	HS5	0376 25 12	250/1000
M6	12 mm	12 mm	HS6	0376 26 12	250
M6	12 mm	15 mm	HS6	0376 26 15	250
M6	12 mm	18 mm	HS6	0376 26 18	250
M8	14 mm	15 mm	HS8	0376 28 15	250
M8	16 mm	18 mm	HS8	0376 28 18	250
M10	18.5 mm	20 mm	HS10	0376 210 20	250
M12	22 mm	25 mm	HS12	0376 212 25	100

Can be stored in ORSY system

Details/Application

Wood, plastic and other soft materials.

Notice

Please use the corresponding bits (art. pre-no. 0614) as insertion tools.