


Split pin

DIN 94 stainless steel A4

- To secure castellated nuts in conjunction with bolts or threaded pins with split pin hole (e.g. steering linkage and tracking gears in motor vehicles)
- To secure split pin bolts

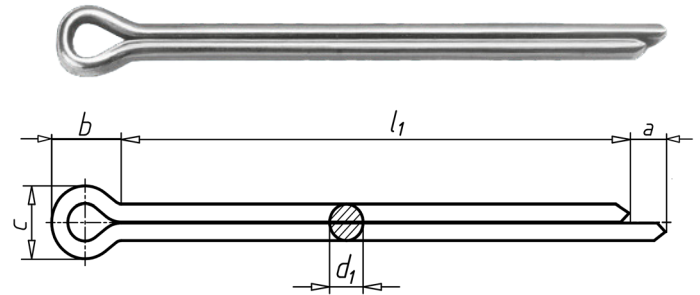

Nominal diameter (d1)	Length (l1)	Longitudinal external diameter of ring (b)	Transverse external diameter of ring (c)	Length between two pins of a splint (a)	Art. no.
1.2mm	20mm	3.2mm	1.7mm	2.5mm	0483 12 20
1.6mm	20mm	3.2mm	2.4mm	2.5mm	0483 16 20
2.0mm	20mm	4.0mm	3.6mm	2.5mm	0483 20 20
2.0mm	32mm	4.0mm	3.6mm	2.5mm	0483 20 32
2.5mm	20mm	5.0mm	4.0mm	2.5mm	0483 25 20
2.5mm	25mm	5.0mm	4.0mm	2.5mm	0483 25 25
2.5mm	32mm	5.0mm	4.0mm	2.5mm	0483 25 32
2.5mm	40mm	5.0mm	4.0mm	2.5mm	0483 25 40
2.5mm	50mm	5.0mm	4.0mm	2.5mm	0483 25 50
3.2mm	20mm	6.4mm	5.1mm	3.2mm	0483 32 20
3.2mm	25mm	6.4mm	5.1mm	3.2mm	0483 32 25
3.2mm	32mm	6.4mm	5.1mm	3.2mm	0483 32 32
3.2mm	40mm	6.4mm	5.1mm	3.2mm	0483 32 40
3.2mm	50mm	6.4mm	5.1mm	3.2mm	0486 32 50
3.2mm	63mm	6.4mm	5.1mm	3.2mm	0483 32 63
4.0mm	20mm	8.0mm	6.5mm	4.0mm	0483 40 20
4.0mm	25mm	8.0mm	6.5mm	4.0mm	0483 40 25
4.0mm	32mm	8.0mm	6.5mm	4.0mm	0483 40 32
4.0mm	40mm	8.0mm	6.5mm	4.0mm	0483 40 40
4.0mm	50mm	8.0mm	6.5mm	4.0mm	0483 40 50
4.0mm	90mm	8.0mm	6.5mm	4.0mm	0483 40 90
5.0mm	32mm	10.0mm	8.0mm	4.0mm	0483 50 32
5.0mm	40mm	10.0mm	8.0mm	4.0mm	0483 50 40
5.0mm	50mm	10.0mm	8.0mm	4.0mm	0483 50 50
5.0mm	63mm	10.0mm	8.0mm	4.0mm	0483 50 63
5.0mm	100mm	10.0mm	8.0mm	4.0mm	0483 50 100
6.3mm	100mm	12.6mm	10.3mm	4.0mm	0483 63 100
6.3mm	32mm	12.6mm	10.3mm	4.0mm	0483 63 32
6.3mm	40mm	12.6mm	10.3mm	4.0mm	0483 63 40
6.3mm	50mm	12.6mm	10.3mm	4.0mm	0483 63 50
6.3mm	63mm	12.6mm	10.3mm	4.0mm	0483 63 63
6.3mm	71mm	12.6mm	10.3mm	4.0mm	0483 63 71