

Horizontal rotation laser RL2-14

Specifically designed for outdoor use. Extremely robust with a long service life, and easy to operate. The glass-fibre-reinforced composite housing makes the RL2-14 perfect for use on construction sites.

Very high levels of accuracy, even in adverse weather conditions

Complies with ISO 17123-6

Saves time

Automatic self-levelling takes just seconds

Prevents levelling errors

Automatic level monitoring prevents levelling errors caused by wind, soft surfaces and impacts against the tripod.

Complete protection against dirt and water

Protection class IP67

2 Years Warranty

on issues of material and production



Laser category	2
Coverage distance	400 m
Measuring accuracy (per length)	1 mm/10m
Selflevelling range (+/-)	5 Degree
IP protection class	IP 67
Type of rechargeable battery/battery	Alkali
Number of rechargeable batteries/batteries	4 PCS
Min./max. storage temperature	-20 to 70 °C
Min. application temperature	-10 °C
Min. storage temperature	-20 °C
Max. application temperature	50 °C
Max. usage duration	60 h



Art. no. 5709 300 302

P. Qty.: 1

In plastic case with metal closure

Details/Application

- Transfer levels
- Horizontal alignment indoors and outdoors
- Monitor the excavation of foundation pits
- Suspend ceilings

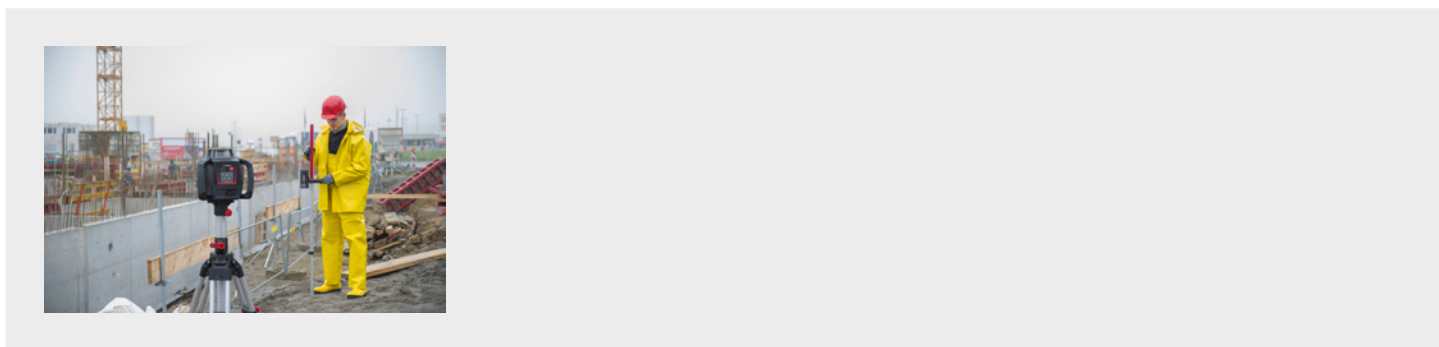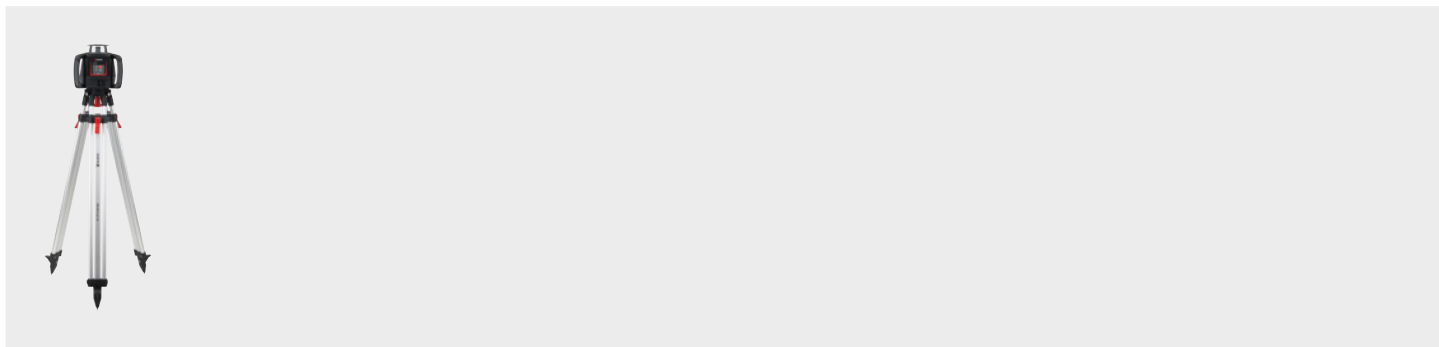

Notice

Batteries not included in the scope of delivery

Related products for	Designation	Art. no.
	High Power battery 1.5 V/DC; Mono D; LR20; AM1	0827 114
	Telescopic levelling staff	0714 64 425
	Aluminium flat-headed stand	0714 649 302
	Laser receiver LR5-14	5709 300 451
	5/8" inch wall holder For rotary laser level and multi-line laser	5709 300 900