

Door hinge VLB 60 3D

Concealed door hinge for abutting doors

The hinges are recessed and are not visible when the door is closed

Can be adjusted in three directions without dismantling the door leaf

The toothed clamping plates reliably prevent independent and unwanted height adjustment

Maintenance-free!

Material of the housing	ALU/ST
Surface	Lacquered
DIN direction	DIN R/L
Lateral adjustment	+/- 3 mm
Height adjustment	+/- 3 mm
Contact pressure adjustment	+ 2 mm/- 1 mm
Integrated hinge side security	No
Load capacity with 2 hinges	100 kg
Opening angle	180 Degree
Standards	EN 1935
Hinge class	12
EC declaration of conformity (CE)	Yes
Construction product	Yes
Environmental Product Declaration	No
Included in delivery (Lieferumfang)	2 x VLB 60 3-D hinges, 8 x special screws M5 x 13.5 mm, nickel-plated, TX20 (for mounting hinges on the mounting plate for wooden wrap-around frames)

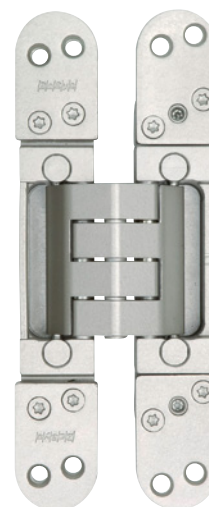


Illustration only

Colour	Art. No.	P. Qty.
Silver F1	0687 380 062	2
Velour nickel coloured	0687 380 060	2

Details/Application

The hinges can be used in DIN R and DIN L doors without alteration.

Suitable for abutting building doors on wooden block, wooden wrap-around, steel and aluminium frames.



Notice

To install the hinges, milling jigs, cutters Ø 24 mm and a stop ring Ø 30 mm are required.

If the hinges are installed on wooden wrap-around frames, separate mounting plates are required.

Specified dimensions not binding. Subject to technical changes!

Technical Information

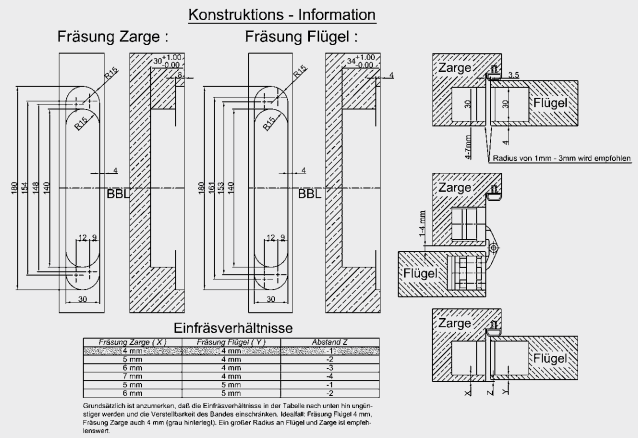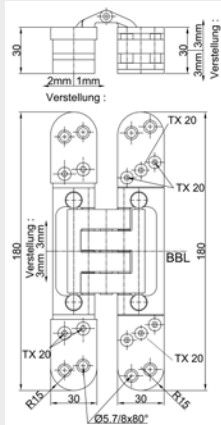

Related products	Art. No.
Mounting plate For VLB 60 and VLB 100	0687 380 500
Mounting plate For VLB 60 and VLB 100	0687 380 505
Mounting plate For VLB 60 and VLB 100	0687 380 509
Universal milling gauge body 118 A	0688 396 100
Plate carrier	0688 396 111