

FRAME ANCHORS CSK FLAT HEAD SCREW


Frame anchors countersunk flat head screws.



Nylon frame anchor for fixing of doors and windows frames, kitchen cabinets, wood strips, covering, wall plates, sole plates, battens. Suitable for concrete, stone, solid brick, solid block.


- Extended nylon plug for through fixing, with countersunk collar for flush anchoring.
- Available in diam. 6, 8 and 10 and for thicknesses up to 160 mm.
- Easy installation even on limited thickness supports due to reduced anchoring depth.
- Quality of materials and performance at reduced costs.

Technical Data	
Plug material	Polyamide 6, grey color RAL 7035
Screw material	carbon steel, cl. 5.8, treated with zinc plating Cr ³⁺ thickness ≥5μm
Installation Temperature	0°C ÷ +40°C
Working Temperature	40°C ÷ +80°C



Description	Size 6mm	Size 8mm	Size 10mm
Drill diameter d_0 /(mm)	6	8	10
Drilling Depth l_a /(mm)	50	50	60
Installation depth h_{nom} /(mm)	30	40	50
Concrete C20/25 daN	22	50	90
Solid brick daN	14	45	76

Check the technical documentation and as the case requires, design properly and/or adopt other safety factors • 1daN=1Kg

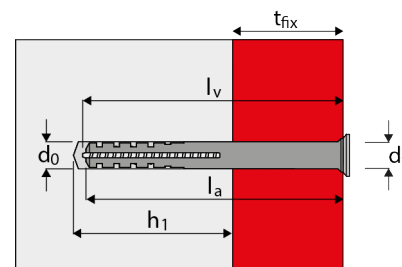

Art.-Nr.	Size	Ø Drilling d_0 /(mm)	Length Plug l_a /(mm)	Depth Install. h_{nom} /(mm)	Depth Drilling h_1 /(mm)	Max Thick. Fixable t_{fix} /(mm)	Pack pcs.	Carton pcs.
9121635	6 x 35	6	35	30	40	5	100	2400
9121650	6 x 50	6	50	30	40	20	100	2400
9121660	6 x 60	6	60	30	40	30	100	2400
9121860	8 x 60	8	60	40	55	20	50	1200
9121880	8 x 80	8	80	40	55	40	50	1200
91218100	8 x 100	8	100	40	55	60	50	800
91218120	8 x 120	8	120	40	55	80	25	800
91218135	8 x 135	8	135	40	55	95	25	600
91218160	8 x 160	8	160	40	55	120	25	450
91211080	10 x 80	10	80	50	65	30	25	600
912110100	10 x 100	10	100	50	65	50	25	600
912110115	10 x 115	10	115	50	65	65	20	480
912110135	10 x 135	10	135	50	65	85	20	360
912110160	10 x 160	10	160	50	65	110	20	360