


TIPP® PROJECT PIPE CLAMP




Jointed pipe clamp with captive screw

Application

Pipe attachments of drinking water and heating pipes

Art. No.	0543 911 020	0543 911 023	0543 911 030	0543 911 037
P.Qty.	300	300	300	200
Min./max. clamping range	16 - 20 mm	19 - 23 mm	25 - 30 mm	32 - 37 mm
Connection thread	M8	M8	M8	M8
Permissible load	800 N	800 N	800 N	800 N
Min./max. temperature resistance	-30 to 110 °C	-30 to 110 °C	-30 to 110 °C	-30 to 110 °C
Material	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR
Surface	Galvanized	Galvanized	Galvanized	Galvanized
Metal strap width x metal strap thickness	20 x 1 mm	20 x 1 mm	20 x 1 mm	20 x 1 mm
Height from center of pipe incl. weld-on nut	19.5 mm	21.5 mm	24.5 mm	28 mm
Width	43 mm	47 mm	53 mm	60 mm
Product weight (per piece)	32.5 g	34.7 g	39.1 g	45.1 g

TIPP® PROJECT PIPE CLAMP

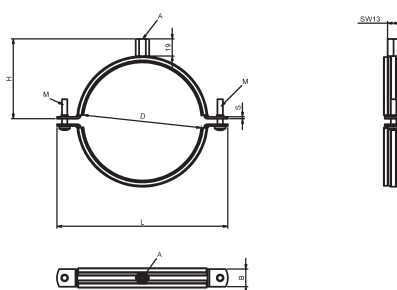

Two-screw clamp with 2 M6 locking screws

Application

Pipe attachments of drinking water and heating pipes

Art. No.	0543 912 046	0543 912 053	0543 912 066	0543 912 080	0543 912 094	0543 912 116
P. Qty.	220	180	150	100	75	55
Min./max. clamping range	39 - 46 mm	48 - 53 mm	59 - 66 mm	74 - 80 mm	87 - 94 mm	110 - 116 mm
Connection thread	M8 x M10	M8 x M10	M8 x M10	M8 x M10	M8 x M10	M8 x M10
Permissible load	1200 N	1200 N	1200 N	1500 N	1500 N	1500 N
Min./max. temperature resistance	-30 to 110 °C	-30 to 110 °C	-30 to 110 °C	-30 to 110 °C	-30 to 110 °C	-30 to 110 °C
Material	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR	Structural steel, 1.0037 previously S235 JR
Surface	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized
Metal strap width x metal strap thickness	20 x 1.2 mm	20 x 1.2 mm	20 x 1.2 mm	20 x 1.5 mm	20 x 1.5 mm	20 x 1.5 mm
Height from center of pipe incl. weld-on nut	45.2 mm	49.2 mm	54.8 mm	61.7 mm	67.3 mm	77.2 mm
Width	91 mm	98 mm	111 mm	124 mm	137 mm	163 mm
Product weight (per piece)	65.9 g	72.2 g	86 g	110 g	129.3 g	172.7 g